


TRINITY CONTAINERS STORAGE VESSELS

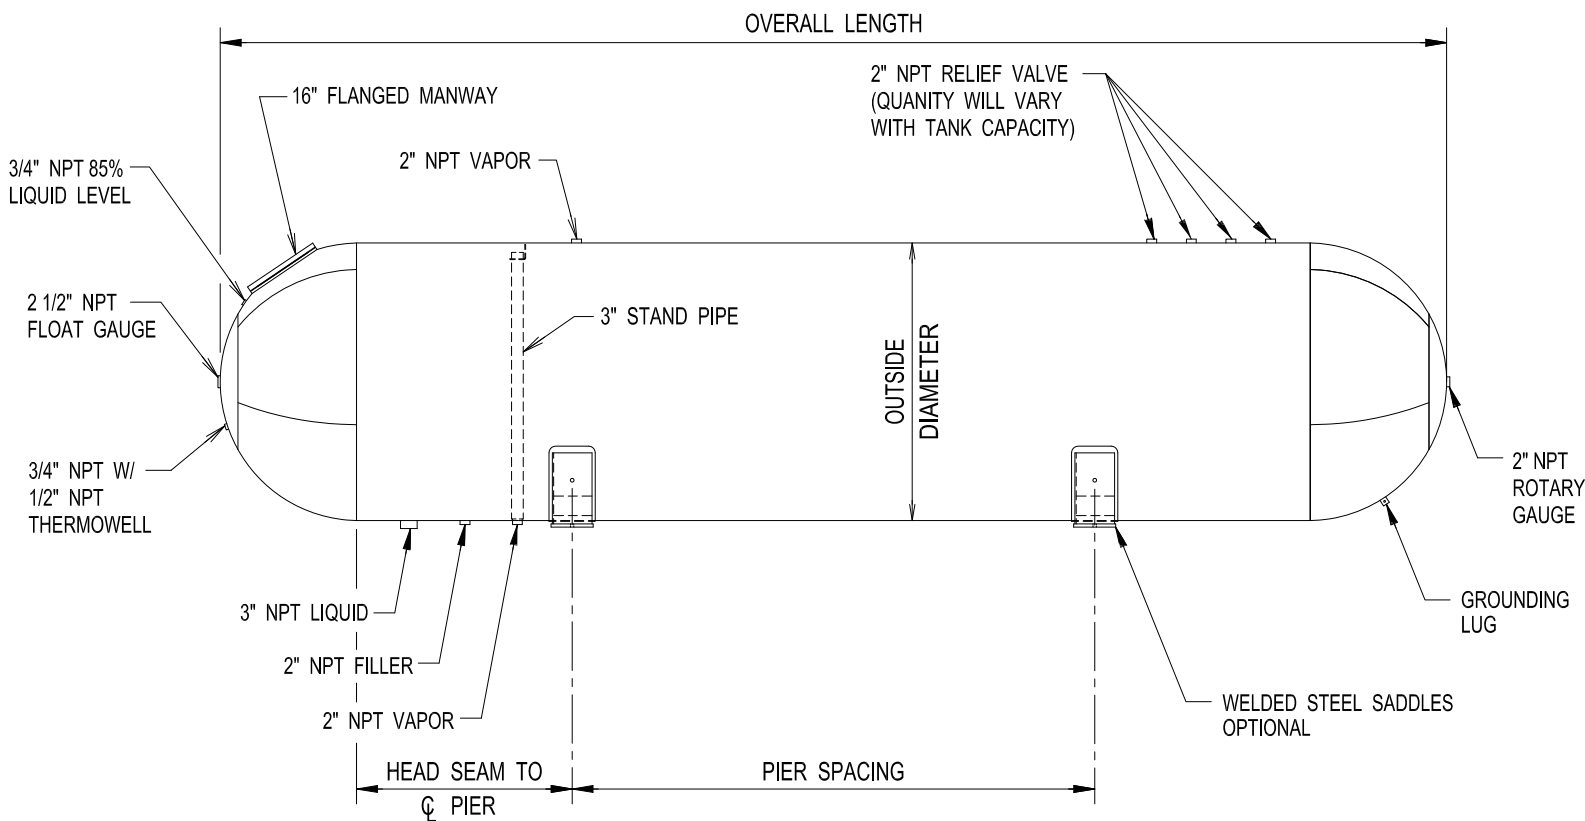

Containers are available for other commodities and design conditions such as: Propane, Ammonia and CO₂. Standard openings are shown. Additional openings are optional. Ask your sales representative for details.

General Design Specifications

Conforms to the Latest Edition, Latest Revision of the ASME, Section VIII, Division 1 Specifications for Pressure Vessels. Standard operating pressure 250 psi @ 125° F.

Vessels are externally blasted per SSPC-SP6 and Primed with Sherwin-Williams Primer.

STORAGE VESSEL DIMENSIONAL INFORMATION

All vessels dimensions are approximately

NOM. CAPACITY IN US WATER GALS	OUTSIDE DIAMETER	OVERALL LENGTH	PIER SPACING *	HEAD SEAM TO \varnothing PIER	ESTIMATED WEIGHT LBS
3,900	84"	16' - 3"	5' - 7 1/2" *	1' - 10 1/2"	5,893
6,565	84"	25' - 10 1/2"	8' - 0" *	5' - 6"	9,723
12,000	84"	44' - 10 1/2"	27' - 0" *	5' - 6"	17,301
18,000	109.346"	40' - 9 3/8"	21' - 0" *	5' - 5"	26,107
30,000	109.346"	65' - 11 3/8"	46' - 0" *	5' - 6"	43,539
30,000	131.875"	46' - 9 7/8"	24' - 11 7/8" *	5' - 6 1/16"	43,144
45,000	131.875"	68' - 4 7/8"	46' - 7" *	5' - 6"	65,015
60,000	131.875"	90' - 0"	68' - 2 1/8" *	5' - 6"	86,662
90,000	131.875"	133' - 3 7/8"	90' - 6" *	16' - 0"	130,213
120,000	131.875"	176' - 4 1/2"	117' - 0" *	24' - 3 5/16"	177,410

* Pier spacing should be confirmed before pouring.